

06-19-00

JC816 U.S. PTO
09/596753

06/15/00

ATTORNEY DOCKET NO.
016295.0597
(DC-02236)

PATENT APPLICATION

APPLICATION FOR U.S. PATENT UNDER 37 C.F.R. 1.53(b)
TRANSMITTAL FORM

Box Patent Application
ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application
of:

Inventor(s): Michael D. Christensen, et al.

Entitled: SYSTEM AND METHOD FOR TRACKING BOOTABLE DEVICES

Enclosed are: X Specification(31 pages)
 X Drawing(s) (2 Sheets Formal)

 X Signed combined Declaration and Power of Attorney.

 X Information Disclosure Statement (IDS) PTO-1449 with
copies of references cited.

 X Certificate of Mailing

 X Return Receipt Postcard

 X An Assignment of the invention to **DELL PRODUCTS L.P.** is
attached. A cover sheet in compliance with 37 C.F.R.
§§ 3.28 and 3.31 is included with the Assignment
recordation fee of \$40.00 pursuant to 37 C.F.R.
§ 1.21(h).

Applicant is large Entity.

FEE CALCULATION					FEE
	Number		Number Extra	Rate	Basic Fee
					\$ 690.00
Total Claims:	21	-20 =	1	X \$18 =	\$ 18.00
Independent Claims	3	-3 =		X \$78 =	\$ 0.00
TOTAL FILING FEE =					\$ 708.00

Attorney's Docket:
016295.0597
(DC-02236)
Page 2

PATENT APPLICATION

Enclosed is a check in the amount of \$708.00 to satisfy filing fee requirements under 37 C.F.R. § 1.16. Please charge any additional fees or credit any overpayment to Deposit Account No. 02-0383 of BAKER BOTTS L.L.P. **A duplicate copy of this sheet is enclosed.**

Respectfully submitted,

BAKER BOTTS L.L.P.
Attorneys for Applicants



Brian A. Dietzel
Reg. No. 44,656

Date: June 15, 2000

Correspondence Address:
Thomas R. Felger
Baker Botts L.L.P.
One Shell Plaza
910 Louisiana
Houston, Texas 77002-4995
Tel. 512.322.2599
Fax. 512.322.2501

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

JC816 U.S. PTO
09/596753
06/15/00

In re Application of: Michael D. Christensen
Date Filed: June 15, 2000
Title: SYSTEM AND METHOD FOR TRACKING
BOOTABLE DEVICES

Box Patent Application
Honorable Assistant Commissioner
of Patents
Washington, D.C. 20231

Dear Sir:

CERTIFICATE OF MAILING BY EXPRESS MAIL

I hereby certify that the attached Transmittal, Patent Application, Declaration and Power of Attorney, Formal Drawings, Assignment and Assignment Recordation Cover Sheet PTO-1595, Information Disclosure Statement and PTO-1449 with references are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on this 15th day of June, 2000, and is addressed to the Assistant Commissioner of Patents, Washington, D.C. 20231.


Matthew Beeter

Express Mail Receipt

No. EL519495315US
Attorney's Docket:
016295.0597
(DC-02236)

SYSTEM AND METHOD FOR TRACKING BOOTABLE DEVICES

Inventor:

Michael D. Christensen
1171 Forest Bluff Trail
Round Rock, Texas 78664

Mukund Purshottam Khatri
2504 Emmett Parkway
Austin, Texas 78728

Assignee:

DELL PRODUCTS L.P.
One Dell Way
Round Rock, Texas 78682-2244

BAKER BOTTS L.L.P.
One Shell Plaza
910 Louisiana
Houston, Texas 77002-4995

Attorney's Docket: 016295.0597
(DC-2236)

ATTORNEY'S DOCKET
016295.0597
(DC-2236)

PATENT APPLICATION

1

SYSTEM AND METHOD FOR TRACKING BOOTABLE DEVICES

TECHNICAL FIELD

The present disclosure relates generally to computer systems and, more particularly, to a system and method for tracking bootable devices.

005639-0400

BACKGROUND

Computer systems, especially server systems, can generally be configured to boot from one of several available devices in the computer system. In some systems, a user may be able to specify the preferred boot device or boot order of the computer system. For example, the user of a computer system may instruct the computer system to boot from a specific hard drive, magnetic disk, CD-ROM or other bootable device.

10 In the case of a computer system having one or more PCI buses, the computer system may boot from any one of the bootable devices coupled to any one of the PCI buses. To facilitate this flexibility, the PCI buses of a multiple PCI bus system may be numbered. In general, the first PCI bus is numbered 0 and the remaining PCI buses are numbered sequentially from 0. Similarly, the devices coupled to each of the sequentially numbered PCI buses may be identified by a device number and a function number. Thus, each device coupled to a PCI bus may be identified by its PCI bus number, device number and function number. As an example, the first device on the first PCI bus may be identified as device 0 on PCI bus 0 with function number 1, the second device on the first PCI bus may be identified as device 1 on PCI bus 0 with function number 0, and so on.

However, the removal of a PCI device from or the addition of a PCI device to the computer system may cause a change in the sequence in which the PCI devices are invoked or numbered. As a result, this new sequence of PCI devices may not match a stored sequence of PCI

devices when the new sequence is compared to the previous sequence during the current boot of the computer system. Subsequently, one or more newly added or removed bootable devices may alter the priority of existing bootable
5 devices, thereby resulting in boot errors. As a further result, current selectable boot order techniques occasionally fail to correctly identify plug and play (PnP) expansion headers associated with each bootable device through power cycles when a bootable device is
10 added to or removed from the computer system. In addition, conventional selectable boot order techniques are often unable to distinguish between an existing device and a newly added device when the newly added device is similar to the existing device.

SUMMARY

In accordance with teachings of the present disclosure, a system and method are disclosed for tracking bootable devices that provide significant advantages over current computer system boot device management techniques. In one aspect, the present disclosure provides a computer system having one or more installed bootable devices and a computer readable medium storing identification data for each of the bootable devices. The identification data preferably includes host bridge identification data.

In another aspect, a method is provided for uniquely identifying bootable devices coupled to one or more slots in a computer system. The method preferably includes comparing a bus number, device number and function number associated with each bootable device to a bus number, device number and function number associated with each slot. The method preferably further includes determining a host bridge number associated with each bootable device having a bus number, device number and function number matching the bus number, device number and function number of a slot. An identifier for each bootable device, based on at least the host bridge number and identification data maintained by the bootable device, is also preferably created according to the method.

In yet another aspect, a method is provided for identifying bootable devices in a computer system. The method preferably includes determining a bus number for each bootable device and subsequently determining a host bridge number associated with each bus of the computer

system. The method preferably further includes reading identification data stored on each bootable device in the computer system and creating an identifier for each bootable device using the host bridge number and the
5 identification data read from each bootable device.

One technical advantage provided by the present disclosure is the unique identification of bootable devices through repeated power cycles.

Another technical advantage provided by the present
10 disclosure is the elimination of boot order errors resulting from the addition of bootable devices to a computer system.

Yet another technical advantage provided by the present disclosure is the ability for a user of a
15 computer system to positively identify bootable devices including instances of multiples of the same device.

Other technical advantages will be apparent to those of ordinary skill in the art in view of the following specification, claims, and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the present
embodiments and advantages thereof may be acquired by
referring to the following description taken in
5 conjunction with the accompanying drawings, in which like
reference numbers indicate like features, and wherein:

FIGURE 1 is a schematic drawing showing a block
diagram for one architecture of a computer system
incorporating teachings of the present disclosure;

10 FIGURE 2 is a schematic drawing showing a block
diagram for one operation cycle of a computer system
incorporating teachings of the present disclosure;

FIGURE 3 is a schematic drawing showing a flow
diagram depicting a method of identifying bootable
15 devices in a computer system incorporating teachings of
the present disclosure; and

FIGURE 4 is a schematic drawing showing one example
of a setup screen according to teachings of the present
disclosure.

DETAILED DESCRIPTION

Preferred embodiments and their advantages are best understood by reference to FIGURES 1 through 4, wherein like numbers are used to indicate like and corresponding parts. In particular, the present disclosure concerns a system and method for tracking or identifying bootable devices. The system and method described are especially useful in those instances in which similar bootable devices may be located in separate locations in the architecture of a computer system, such as when the computer system includes multiples of the same bootable device on a single PCI bus or in the case when the computer system includes multiple PCI buses, each having the same bootable device installed in a slot on respective PCI buses.

FIGURE 1 illustrates a schematic block diagram of a computer system indicated generally at 10. Computer system 10 preferably includes central processing unit (CPU) 12 coupled to host bus 14. Also preferably coupled to host bus 14 are host bridges 16a, 16b and 16c, at least one of which is also preferably coupled to system memory 18. Host bridges 16a, 16b and 16c are preferably coupled to PCI buses 20a, 20b and 20c. Host bridge 16a is preferably coupled to PCI bus 20a, host bridge 16b is preferably coupled to PCI bus 20b and host bridge 16c is preferably coupled to PCI bus 20c.

Preferably coupled to PCI bus 20a is expansion bus bridge 22, which is preferably coupled to expansion bus 24. Expansion bus 24 may be an ISA bus, and expansion bridge 22 may be a PCI/ISA bridge. As an alternative,

expansion bus 24 and expansion bridge 22 may operate according to another suitable standard. Preferably coupled to expansion bus 24 are BIOS ROM 26 and nonvolatile memory 28. Nonvolatile memory 28 may be
5 NVRAM or CMOS memory. Preferably coupled to PCI bus 20a is PCI IDE controller 38, which is in turn preferably coupled to IDE device 36. PCI to PCI bridge 39 may also be preferably coupled to PCI bus 20a. PCI to PCI bridge 39 preferably allows one or more devices, bootable or
10 otherwise, to be coupled thereto and generally adds one or more system buses to computer system 10.

In computer system 10 of FIGURE 1, PCI buses 20a, 20b and 20c may operate at different speeds. For example, PCI bus 20a may operate at 33 MHz, while PCI
15 buses 20b and 20c may operate at 66 MHz. Preferably coupled to PCI bus 20a are mass storage controllers 30. Preferably coupled to each mass storage controller 30 are device drives 32. Mass storage controllers 30 may include SCSI controllers, RAID controllers, or any other
20 controller that is operable to manage the stored memory of a PCI device. Each mass storage controller 30 preferably includes an option BIOS ROM 34 that may feature BIOS extension code that may be used to configure device drives 32. As shown in FIGURE 1, mass storage
25 controllers 30 may manage multiple bootable device drives 32. As an alternative, mass storage controller 30 may manage a single bootable device 32. As illustrated, host bridge 16b is preferably coupled to PCI bus 20b as well as associated mass storage controllers 30 and device
30 drives 32.

At each boot of computer system 10, the PCI buses 20a, 20b and 20c as well as any devices on each bus are typically numbered sequentially, with the PCI buses being numbered incrementally beginning at 0. Conventionally,
5 each physical PCI slot is associated with a PCI device number, function number and bus number. The PCI device numbers of each PCI bus are typically numbered sequentially, beginning at 1, with the number 0 typically being reserved for the bridge. Similarly, the PCI
10 function numbers are assigned based on a particular devices capabilities. For example, for a single function PCI devices, the function number is typically 0. For multi-function PCI devices, the function number may be a number in a range of suitable function numbers (0, 1, 2,
15 ...). As an example, BIOS ROM 26 may recognize PCI bus 20a as PCI bus 0. First mass storage controller 30 on PCI bus 20a may be recognized by BIOS ROM 26 as PCI device 1 occupying slot 1 on PCI bus 0 and with a function number of 0.

20 As illustrated in FIGURE 1, host bridge 16a may be numbered host bridge number 0 while host bridge 16b may be numbered host bridge number 1 and host bridge 16c may be numbered host bridge number 2. Coupled to host bridge number 0 is PCI bus 20a and expansion bus 24. PCI bus
25 20a may be numbered bus number 0 thereby giving host bridge number 0 the bus number range 0. Similarly, host bridge number 1 may have PCI bus 20b numbered bus number 1 giving host bridge number 1 the bus range of 1. Similarly, host bridge number 2 may have PCI bus 20c

numbered bus number 2 giving host bridge number 2 the bus range of 2.

Depending upon the hardware included or installed in computer system 10, the numbering of the buses may
5 change. Including PCI to PCI bridge 39 in computer system 10 typically causes such changes to occur. In one example, coupling PCI to PCI bridge 39 to a bootable device, such as mass storage controller 30, on one side and to PCI bus 20a on the other side may add an
10 additional bus to computer system 10. Subsequently, referring back to the example mentioned above, PCI bus 20a may be numbered 0 and the additional bus resulting from the presence of PCI to PCI bridge 39 may be numbered 1. As a further effect, PCI bus 20b may subsequently be
15 numbered 2 and PCI bus 20c may subsequently be numbered 3. Thus, host bridge 16a would now have a bus range of 0 through 1, host bridge 16b would have a new bus range of 2 and host bridge 16c would have a new bus range of 3. Similar to other devices coupled to a slot of computer
20 system 10, PCI to PCI bridge 39 may be associated with the PCI device number, function number and bus number assigned to the slot to which it is preferably coupled.

In operation, the option BIOS ROM 34 of each mass storage controller may be queried by BIOS ROM 26 during
25 setup in order to identify the mass storage controller 30. As an example, one mass storage controller 30 may identify itself, following a query by BIOS ROM 26, as an "XYZ Co. Model 001 SCSI Controller." The system and method of the present disclosure preferably permits the
30 user to identify the bootable devices of the system by

associating, as part of a setup program, the name of the mass storage controller 30 and the PCI slot number to which the mass storage controller 30 is connected.

FIGURE 2 is a flow diagram depicting a method for
5 identifying bootable devices according to teachings of the presently disclosed system and method. Computer system 10 is powered on at step 52 causing computer system 10 to perform one or more initialization routines and to eventually load an operating system for computer
10 system 10. In response to being powered on at step 52, computer system 10 preferably enters a POST (Power On Self Test) routine and/or BIOS (Basic Input/Output Systems) routine at step 54 (POST/BIOS). As mentioned above, the BIOS routine performed at step 54 may be
15 stored, in part, on BIOS ROM 26.

The POST/BIOS routine initiated at step 54 generally includes a series of tests that are performed on computer system 10. Additionally, a series of component initializations and configurations may also occur during
20 the POST/BIOS routine. For example, a POST routine may begin by transmitting an electrical signal along a programmed path to CPU 12 to clear leftover data from the CPU's 12 internal memory registers and to reset the program counter of CPU 12 to the address of the next
25 instruction to be processed by CPU 12. In general, the address of the next instruction leads CPU 12 to a ROM chip that contains computer system's 10 BIOS such as BIOS ROM 26.

Upon executing the instruction located in the BIOS
30 ROM 26 pointed to by CPU 12, a program which invokes a

series of computer system 10 checks is preferably initiated. Preferably included in computer system 10 checks are a check of CPU 12 and a check of the POST routine. CPU 12 also preferably sends signals over the system buses to ensure components attached thereto are all generally functioning. A verification that a keyboard (not expressly shown) is properly attached and a determination of whether or not any keys have been pressed may also be performed during startup of computer system 10. A mouse (not expressly shown) may be similarly tested. The system timer or real-time clock may also be tested to ensure all of the computer system's 10 operations function in an organized, synchronized manner.

15 The POST routine preferably tests any memory contained on a display adapter and the video signals that control an associated display or monitor (not expressly shown). Should the memory of the display adapter contain add-in BIOS code specific to the display adapter, that add-in BIOS code may be made part of computer system's 10 overall BIOS at step 54 and to computer system's 10 memory configuration. The POST routine also preferably runs a series of tests to ensure system memory 18 is functioning properly. One method of testing system 25 memory 18 is to write data to each system memory 18, read the data written and compare what was read to what was written.

During execution of the POST/BIOS routine by computer system 10, the components of computer system 10, 30 including PCI buses 20a, 20b and 20c and the PCI devices

of computer system 10, may be identified. One portion of the identification process involves BIOS ROM 26 reading header information that may be included on each bootable device. The header information of each bootable device
5 is typically stored in the option BIOS ROM 34 of the bootable device and generally includes a vendor identification (ID) and a device identification (ID) therein. During a subroutine known as PCI enumeration, the computer system may associate each bootable device
10 with a PCI device number, function number and bus number, as mentioned above.

As a part of the overall system BIOS, or as a separate routine, a PnP (Plug and Play) BIOS may also execute. Whether integrated into the overall system BIOS
15 or as a separate program, the goals of the PnP BIOS are generally the same. One goal of the PnP BIOS is to look for special add-in ROM signatures which indicate that a block of add-in BIOS code for an expansion board or other PnP device follows. The PnP BIOS typically adds a
20 pointer to this add-in signature to indicate to the system BIOS code the location of an expansion header or chain of headers.

Using this pointer, the system BIOS may then identify each PnP device, read through its add-in BIOS
25 code and find each header. Information encoded in an expansion header may include the type of devices coupled to the expansion board, vendor and device IDs as well as the location of code that may be used to boot computer system 10. A device indicator may also be included in
30 the expansion header that indicates whether the ROM on

the expansion board may initialize as a device driver, be shadowed, be cached, or operate as a boot, display or input device. A device type code may also be utilized to aid the system BIOS in determining which devices may be
5 used for booting the system as well as identifying what kind of peripheral is connected through the expansion board.

Once the POST/BIOS and/or the PnP BIOS have completed interrogating computer system 10 to determine
10 operability as well as to collect a listing of the hardware attached to computer system 10, the information associated with the attached hardware is preferably stored in nonvolatile memory, such as NVRAM. Boot tables for the current configuration may then be built based on
15 the gathered information.

In general, during each boot of computer system 10, a new boot table, listing an identifier for each bootable device in a computer system, is built to reflect the bootable devices present in computer system 10 on the
20 current boot. Once the new boot table has been built, a boot table indicative of the bootable device configuration present on the previous boot of computer system 10 is preferably read from storage. Subsequently, the newly built boot table may then be compared with the
25 boot table read from storage to determine if any new bootable devices are present in computer system 10. It is at this stage of startup that previous methods for tracking bootable devices have been unable to consistently identify new bootable devices through each
30 power cycle or to uniquely identify more than one similar

bootable device present in computer system 10. As such,
the present disclosure teaches a method and system for
uniquely identifying bootable devices wherein the unique
identifiers may be used to at least build new boot tables
5 as well as to compare new boot tables to previous
configuration boot tables during startup.

Referring now to FIGURE 3, a flow diagram depicting
a method for identifying bootable devices in a computer
system is illustrated. According to teachings of the
10 present disclosure, there are a plurality of variables
which are preferably employed to uniquely identify the
bootable devices of computer system 10.

In one embodiment, the bootable devices are uniquely
identified by a six byte (forty eight bit) identifier.
15 The identifier preferably includes a thirty two bit
device ID. The device ID preferably includes a sixteen
bit PCI device ID and a sixteen bit PCI vendor ID, each
of which may be read from memory preferably included on
the device being identified. The identifier preferably
20 further includes a sixteen bit device signature. The
device signature preferably includes a three bit PCI
function number, a five bit PCI device number, a three
bit PCI host bridge number and a five bit PCI root bridge
or PCI slot device number, when necessary.

25 Beginning at step 54a, the method for identifying
bootable devices depicted in FIGURE 3 preferably
configures a slot list for computer system 10.
Preferably included in the slot list configured at step
54a are the PCI bus number, device number and function
30 number associated with each slot of computer system 10.

This slot list is preferably stored in a memory, such as system memory 18, for later use and may be discarded upon use.

At step 54b, the bus numbers for the individual
5 bootable devices are obtained/determined. One method for determining the bus numbers for the individual bootable devices includes reading the bus numbers for each device from nonvolatile memory 28 where previously stored. Other methods of obtaining the bus number for the
10 bootable devices of a computer system are considered within the scope of the present disclosure.

At step 54c, characteristics of the chipset employed by the motherboard (not expressly shown) of computer system 10 may be used to determine a bus number range for
15 each host bridge, such as host bridges 16a, 16b and 16c. One such method involves executing an embedded command that is operable to obtain and provide the bus number range information for each host bridge 16a, 16b and 16c of computer system 10. The bus number range information
20 may then be used to associate a host bridge number with each device based on the bus number for each device obtained at step 54b. Other methods of obtaining the bus number range for a given host bridge 16a, 16b and 16c or set of host bridges are considered within the scope of
25 the present disclosure. As mentioned above, the bus number range for each host bridge 16a, 16b and 16c may change depending on the device or devices preferably coupled thereto.

At step 54d, the PCI bus number, device number,
30 function number and slot list are preferably employed to

determine whether or not a bootable device exists on a slot, i.e., is directly coupled to a slot, not coupled through a PCI to PCI bridge 39 to a slot, at step 54e. To make such a determination, the characteristic of
5 computer system 10 mentioned above which assigns the PCI bus, function and device number for a given slot to a device located therein or coupled thereto is employed. Accordingly, the PCI bus, function and device number for each slot may be compared to the PCI bus, function and
10 device number for the individual bootable devices. When the PCI bus, function and device number for a slot matches the PCI bus, function and device number for a bootable device, it may be determined that the bootable device exists in a slot and the method illustrated in
15 FIGURE 3 may proceed to 54g.

When one or more PCI to PCI bridges 39 are included in computer system 10, a particular bootable device's PCI bus, function and device number generally will not match the PCI bus, function and device number of any of the
20 slots in the computer system 10. As mentioned above, this configuration generally results in the PCI to PCI bridge 39 itself being assigned the PCI bus, function and device number of the slot to which it is preferably coupled. Any bootable devices which may be preferably
25 coupled to PCI to PCI bridge 39 would generally have their bus, function and device numbers dictated by settings included on each bootable device. Accordingly, if at step 54e the PCI bus, function and device number of a bootable device is not matched to a PCI bus, function
30 and device number of a slot in the slot list configured

at step 54a, the method depicted in FIGURE 3 proceeds to step 54f.

At step 54f, the identification of the slot or root bridge to which an unmatched bootable device is attached may be determined. As mentioned above, the PCI bus, function and device numbers of a slot are generally assigned to the device which is preferably coupled thereto. As such, a PCI to PCI bridge 39 with a bootable device preferably coupled thereto may be enumerated during system startup with the PCI bus, function and device number of the slot to which it is coupled. As a result, the bootable device coupled to PCI to PCI bridge 39 may be enumerated with a bus, device and function numbers unlike those of any slot included in the architecture of computer system 10. Therefore, the PCI bus, function and device number for any unmatched slots may be compared to the PCI bus, function and device number of unmatched, enumerated devices in computer system 10. Once a match is found between a slot and an enumerated device, the device number of the root bridge or slot may be obtained and associated with the bootable device preferably indirectly coupled thereto as mentioned above and the method depicted in FIGURE 3 may proceed to step 54g.

Once the bus number range for each host bridge 16a, 16b and 16c, as well as the device number for the root bridge or slot when necessary, have been obtained, the host bridge 16a, 16b and 16c to which each bootable device is connected is preferably used in conjunction with a variety of other device variables, such as those

described above, to create a unique identifier or signature. As mentioned above, in one embodiment of the identifier or signature created at step 54f, the vendor ID, device ID, PCI host bridge, PCI function, and PCI
5 device number, as well as the PCI root bridge device number where necessary, of each device are combined to create a unique six byte identifier.

At step 54h, the identifier or signature for each device is stored, preferably in nonvolatile memory. One
10 method of storing the identifier, as mentioned above, involves storing the PCI vendor ID and the PCI device ID as a thirty two (32) bit device ID and storing the host bridge number, PCI device number, PCI function number and possibly the PCI device number of the root bridge as a
15 sixteen (16) bit device signature. Other methods and configurations of storing the unique identifier are considered within the scope of the present disclosure.

Once the identifier for each device has been created and stored, the identifiers are available for use in
20 building new boot tables as mentioned above, as well as for building boot tables for previous system configurations for comparison and for other purposes in which unique identification may be desired. By identifying bootable devices as disclosed herein,
25 problems such as the misidentification of PnP expansion headers and not uniquely identifying multiples of the same type device are eliminated. In addition to being used to compare bootable device configurations through power cycles, the method for tracking bootable devices
30 may also be used to uniquely identify bootable devices in

a setup routine preferably included in BIOS ROM 26 of computer system 10.

As part of such a setup routine, the user may change the boot order of computer system 10. The user of
5 computer system 10 preferably has the option of entering the setup routine at each boot of computer system 10. After computer system 10 scans its system memory 18 and performs other basic system checks as mentioned above, and prior to the loading of an operating system at step
10 56 of FIGURE 2, the user may be presented with the following instructions: "PRESS F2 TO ENTER SETUP." The current boot order of computer system 10 is preferably stored in nonvolatile memory and may be accessed by a boot order routine of the system BIOS. The data that was
15 collected for each bootable device of the computer system is preferably stored in nonvolatile memory by the system BIOS in the event a computer user enters the setup routine. Upon entering setup, computer system 10 preferably displays the current boot order.

20 Should a user elect to enter computer system's 10 setup routine, boot order screen 60 of FIGURE 4 preferably displays the current boot order of computer system 10. In the example of FIGURE 4, the boot order of computer system 10 begins with the "XYZ Co. SCSI Adapter"
25 located in slot 2, and ends with "DEF Co. SCSI Adapter" located slot 1. In operation, computer system 10, represented in FIGURE 1, will generally attempt to boot from the devices in the sequence listed in the stored boot order. The boot order listing of boot order screen
30 60 may also contain information in addition to a listing

of the names and associated slots of the bootable devices. As such, the boot order listing of boot order screen 60 generally identifies the vendor and device ID as well as a physical location of each bootable device in computer system 10. The vendor and device ID of each PCI device are preferably read from a header on each device and may be stored in nonvolatile memory 28 as described above.

According to teachings of the present disclosure, the PCI bus number assigned to each device coupled thereto may vary depending on the components sharing the bus. It is this potential change in bus assignments that may create the limitations in the previous methods discussed above. As such, identifying a bootable device by its bus number may result in improperly recognizing an existing device as a new device when new devices are added to or existing devices are removed from computer system 10 causing bus number assignments to be rearranged.

The listing of bootable devices on boot order screen 60 identifies both the boot order of the listed devices, as well as the location of the bootable devices in computer system 10. In those cases where two bootable devices are identical, and therefore have identical vendor and device IDs, the bootable devices can be positively identified by their location in computer system 10. Using the identification method disclosed herein, a computer user will be able to accurately identify and manipulate the boot order of the bootable devices by reading the boot order screen and visually

inspecting the slots of computer system 10. The identification of the location of each bootable device in boot order screen 60 allows a computer user to select among duplicate bootable devices in computer system 10.

5 A user is given the opportunity to modify the boot order of computer system 10 while in setup. This may be accomplished on boot order screen 60 by highlighting a bootable device and using the up arrow or down arrow keys of a keyboard to move the device up or down in the boot
10 order. As an example, to move a bootable device lower in the boot order, the user would preferably highlight the bootable device, using either a pointing device or keys on a keyboard, and then use the down arrow key to move the device until the device has reached its desired
15 position in the boot order. Once the user has adjusted the boot order of bootable devices, the user closes the setup program, computer system 10 saves the new boot order in nonvolatile memory 28 and computer system 10 reboots according to the newly saved boot order.

20 The system and method for tracking bootable devices in a computer system of the present disclosure permits the user to more easily determine device identities as well as modify the current boot order of a computer system. If the user wishes to boot the computer system
25 to run one of Windows 98, Windows NT, or Linux, the system and method of the present disclosure allows the user to more easily switch among bootable devices without resorting to a trial and error approach for determining the boot order of the present system and for booting the
30 system to one of several operating systems stored in

system hardware. With the identification convention disclosed herein, the user can easily associate a particular bootable device to a particular operating system, even in those instances in which different

5 operating systems, Windows NT and Linux, for example, are installed in identical bootable devices. The system and method is particularly useful in those instances in which the computer system includes multiple bootable devices that have the same or similar device names.

10 Although the disclosed embodiments have been described in detail, it should be understood that various changes, substitutions and alterations can be made to the embodiments without departing from their spirit and scope.

WHAT IS CLAIMED IS:

1. A computer system comprising:
at least two installed bootable devices and
respective host bridges; and
5 a computer readable medium storing identification
data for each of the installed bootable devices; and
the identification data including host bridge
identification data.
- 10 2. The computer system of Claim 1 wherein the
installed bootable devices comprise PCI devices.
3. The computer system of Claim 1 wherein the
identification data further comprises a function number
15 and a device number for each of the installed bootable
devices.
4. The computer system of Claim 1 wherein the
identification data further comprises a vendor
20 identification and a device identification obtained from
each of the installed bootable devices.

5. The computer system of Claim 1 further comprising:

a BIOS stored in the computer readable medium; and
the BIOS operable to access the identification data
5 for each of the installed bootable devices and to display
a list of the installed bootable devices in the computer
system; and

the list including identification of a slot to which
each of the installed bootable devices is coupled such
10 that each of the installed bootable devices is uniquely
identified.

6. The computer system of Claim 5 wherein the BIOS further comprises:

15 a setup routine;
the setup routine operable to display the installed
bootable devices in a boot order; and
the setup routine further operable to modify the
boot order.

20

7. The computer system of Claim 1 wherein the
identification data further comprises a device number
associated with a slot to which the bootable device is
coupled.

8. A method for identifying bootable devices in a computer system, the method comprising:

determining a bus number for each bootable device;

determining a host bridge number associated with

5 each bus number of the computer system;

reading identification data stored on each bootable device in the computer system; and

10 creating an identifier for each bootable device from at least the host bridge number and the identification data read from each bootable device.

9. The method of Claim 8 wherein the identification data includes a vendor identification and a device identification.

15

10. The method of Claim 8 further comprising:

determining a function number and a device number for each bootable device; and

20 incorporating the function number and the device number of each bootable device into the identifier.

11. The method of Claim 8 wherein identifying at least two identical bootable devices comprises:

reading vendor identification and device identification from identification data stored on each
5 identical bootable device;

determining a PCI function number and a PCI device number for each identical bootable device; and

creating an identifier for each identical bootable device from the vendor identification, device
10 identification, PCI function number, PCI device number and host bridge number such that each identical bootable device may be uniquely identified.

12. The method of Claim 8 further comprising
15 displaying the identifier for one or more of the bootable devices in a setup routine.

13. The method of Claim 8 further comprising
displaying the identifier for one or more of the bootable
20 devices in a boot order.

14. The method of Claim 8 further comprising:
creating a slot list including a bus number, device
number and function number associated with each slot of
the computer system;

5 comparing a bus number, device number and function
number associated with each bootable device to respective
values in the slot list;

10 determining the device number of the slot to which
each bootable device having a bus number, device number
and function number which does not match respective
values associated with each slot in the slot list is
coupled; and

15 including the device number of the slot in the
identifier for the bootable device.

15. A method for uniquely identifying bootable devices coupled to one or more slots in a computer system, the method comprising:

comparing a bus number, device number and function
5 number associated with each of the bootable devices to a bus number, device number and function number associated with each of the slots;

determining a host bridge number associated with
each bootable device having a bus number, device number
10 and function number matching the bus number, device number and function number of a slot; and

creating an identifier for each bootable device
based on at least the host bridge number and
identification data maintained by the bootable device.

15

16. The method of Claim 15 further comprising
creating a slot list including the bus number, device
number and function number of each slot in the computer
system.

20

17. The method of Claim 15 further comprising
reading the identification data from a memory maintained
by the bootable device.

25 18. The method of Claim 15 further comprising
storing the identifier for each bootable device in a
memory of the computer system.

19. The method of Claim 15 further comprising:
determining the device number of the slot to which
each bootable device having a bus number, device number
and function number that is different from the bus
5 number, device number and function number associated with
each slot is coupled; and
including the device number of the slot in the
identifier for each bootable device.

10 20. The method of Claim 15 further comprising
displaying at least a portion of the identifier in a
setup routine.

15 21. The method of Claim 15 further comprising the
identification data including a vendor identification and
a device identification.

SYSTEM AND METHOD FOR TRACKING BOOTABLE DEVICES

ABSTRACT OF THE DISCLOSURE

5 A system and method for tracking bootable devices
are disclosed which provide significant advantages over
current computer system device management techniques. A
system incorporating teachings of the present disclosure
may include one or more installed bootable devices and a
computer readable medium storing identification data for
each of the installed bootable devices. The
10 identification data may include host bridge
identification data.

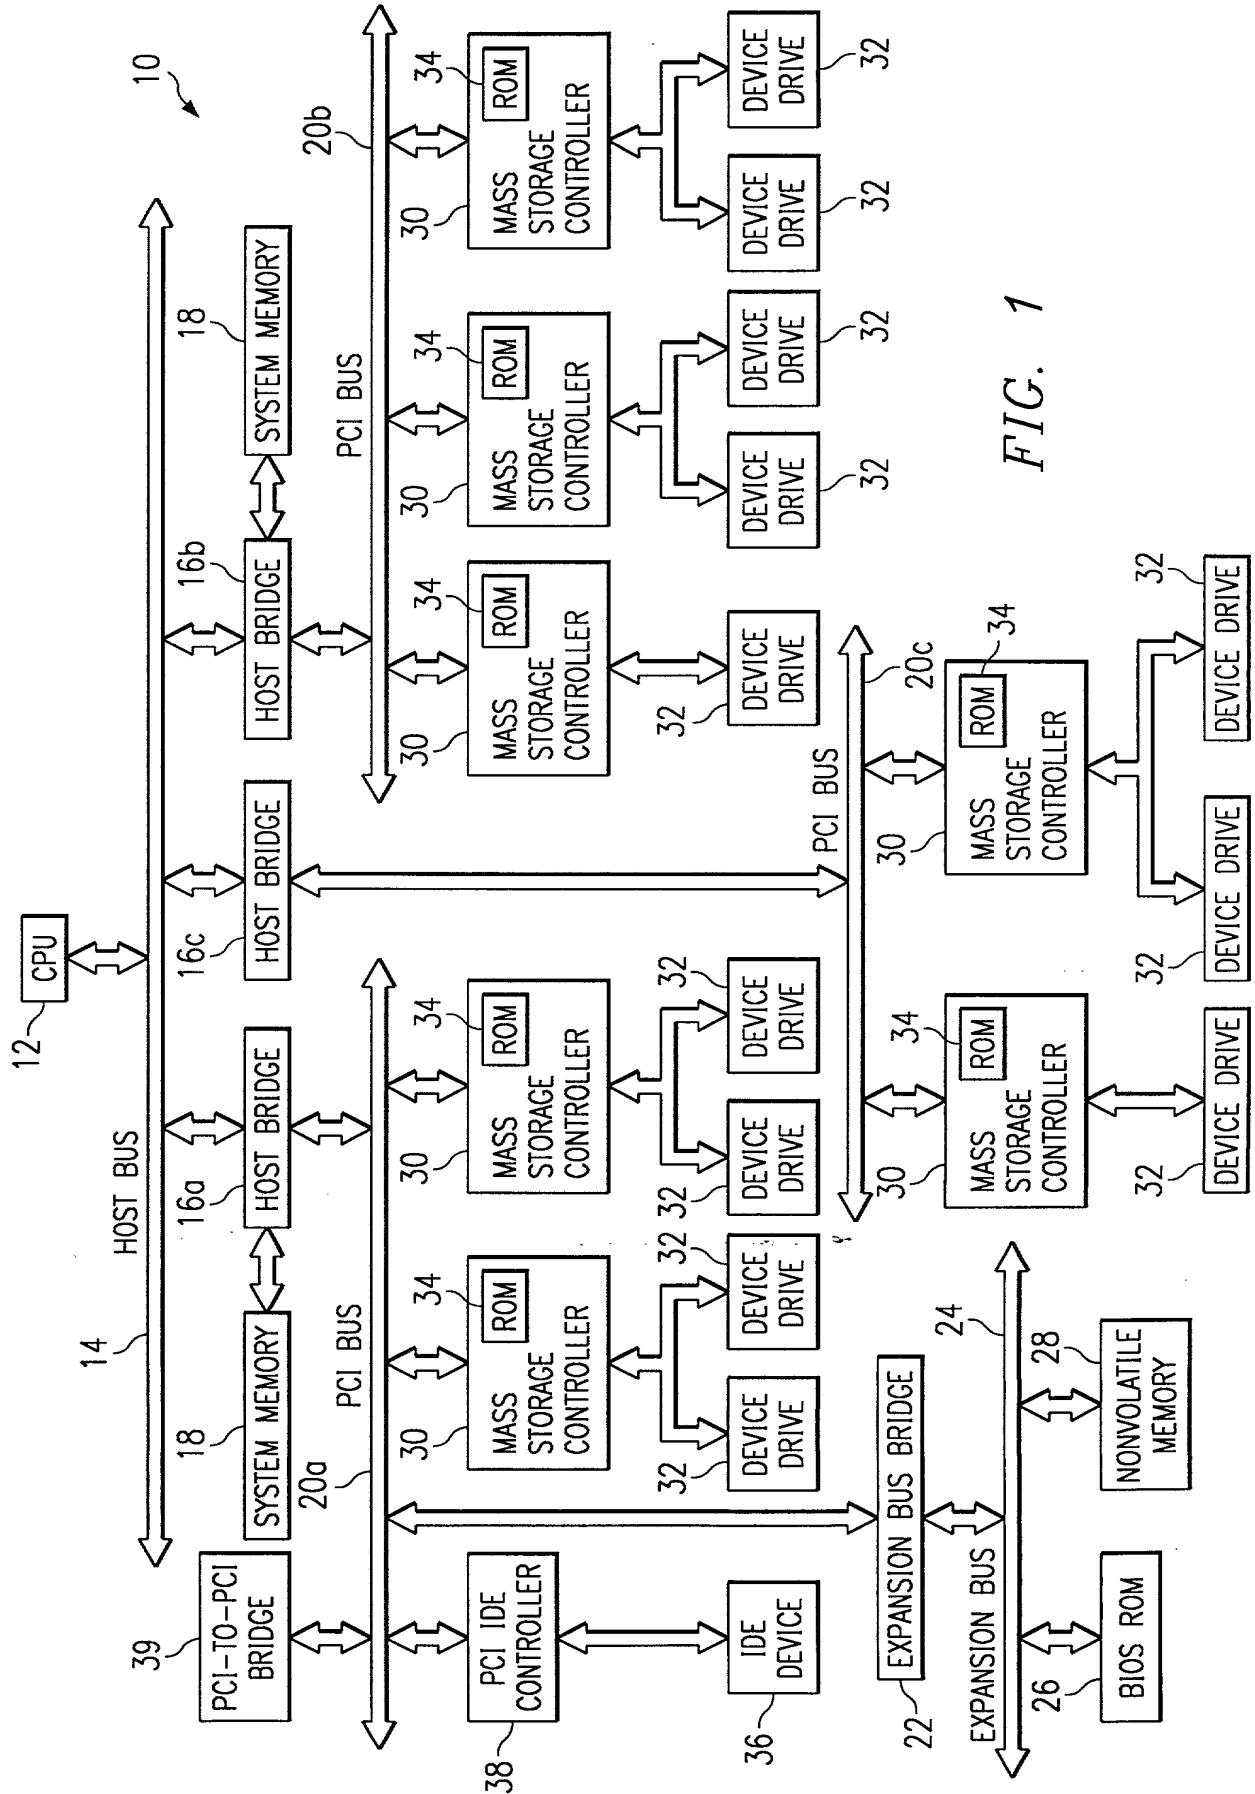


FIG. 1

FIG. 2






FIG. 3

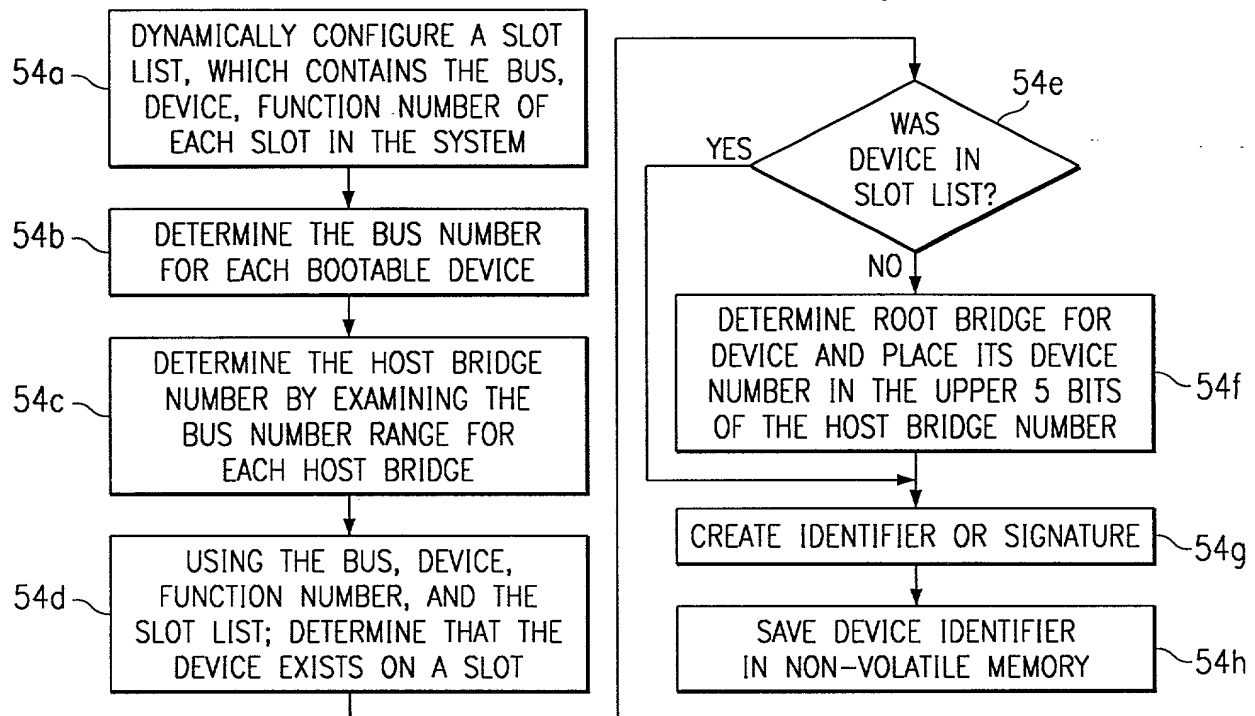

60

FIG. 4

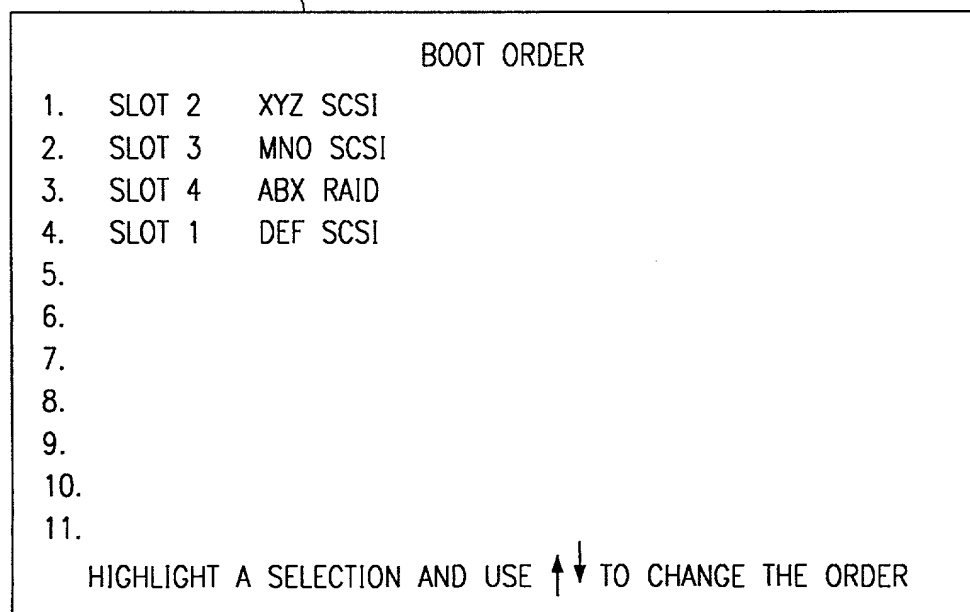

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that:

My residence, post office address and citizenship are as stated below next to my name; that I believe I am the original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention or design entitled **System and Method for Tracking Bootable Devices**, the specification of which (check one):

 X is attached hereto; or

 was filed on as

Application Serial No.

and was amended on (if applicable);

that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above; and that I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Number</u>	<u>Country</u>	<u>Date</u> <u>Filed</u>	<u>Priority</u> <u>Claimed</u> <u>(Yes) (No)</u>
NONE			

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application(s) in the

manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

<u>Application</u> <u>Serial Number</u>	<u>Date</u> <u>Filed</u>	<u>Status</u>
--	-----------------------------	---------------

NONE

I hereby appoint:

Henry Garrana	Reg. No. 27,887
Mark P. Kahler	Reg. No. 29,178
Anthony E. Peterman	Reg. No. 38,270
Diana L. Roberts	Reg. No. 36,654

of Dell Computer Corporation, and the following:

Scott F. Partridge	Reg. No. 28,142
Rodger L. Tate	Reg. No. 27,399
Jerry W. Mills	Reg. No. 23,005
Mitchell D. Lukin	Reg. No. 30,772
Michael E. Wilson	Reg. No. 32,835
G. Alan Witte	Reg. No. 36,061
Lori D. Stiffler	Reg. No. 36,939
Ann C. Livingston	Reg. No. 32,479
Thomas R. Felger	Reg. No. 28,842
Roger J. Fulghum	Reg. No. 39,678
Robert W. Holland	Reg. No. 40,020
Claude E. Cooke, Jr.	Reg. No. 34,142
Melissa J. Szanto	Reg. No. 40,834
Brian E. Szymczak	Reg. No. P47,120
Brian A. Dietzel	Reg. No. 44,656 (Patent Agent)
Kevin R. Imes	Reg. No. 44,795 (Patent Agent)

all of the firm of Baker Botts L.L.P., my attorneys and/or agents with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, and to file and prosecute any international patent applications filed thereon before any international authorities.

Send Correspondence To:

Baker Botts L.L.P.
One Shell Plaza
910 Louisiana
Houston, Texas 77002-4995

Direct Telephone Calls To:

Thomas R. Felger
at (512) 322-2599
Atty. Docket No.016295.0597

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of the joint inventor Michael D. Christensen

Inventor's Signature



Date

6/15/2000

Residence (City, County, State)

Round Rock, Williamson
County, Texas

Citizenship

United States of America

Post Office Address

1171 Forest Bluff Trail
Round Rock, Texas 78664

Full name of the joint inventor

Purshottam *MPK* *6/15/2000*
Mukund ~~Purshottam~~ Khatri

Inventor's Signature

Mukund D Khatri

Date

June 15th, 2000

Residence (City, County, State)

Austin, Travis County, Texas

Citizenship

United States of America

Post Office Address

2504 Emmett Parkway
Austin, Texas 78728